

OUTDOOR CABLE/SS

Steel Wire Self-Supporting Type


* Content is subject to change without notice.

OUTDOOR CABLE/SS

Product Information

* Content is subject to change without notice.

Construction

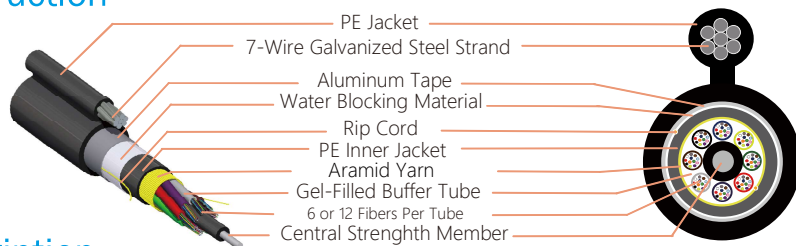

Description

The LT-SS cable is a figure-8 self-supporting design for aerial installation. With this design, 6 or 12 optical fibers are placed within color-coded, gel-filled buffer tubes to be protected from mechanical and environmental forces. An aluminum tape is applied lengthwise over the cable core. And then a durable PE jacket completes the cable construction. Maximum fiber counts can be up to 216 fibers.

Application

- Local area networks
- Outside plant distribution system
- Long haul trunking and feeder
- Long span aerial installation
- CATV, CCTV, telecommunication

Specification

Fiber Count	6 - 36	42 - 48	12 - 72	84 - 96	144 - 216
Fiber Per Tube	6		12		
Central Strength Member	Steel Wire Coating PE				
Inside Loose Tube	Filling Compound				
Wrapping	Water Blocking Material				
Sheath	Black PE				
Cable Diameter: mm(approx)	24.2 x 14	26 x 15.5	28 x 18.3	32.4 x 22.4	
Cable Weight: kg/km(approx)	350	380	390	430	560
Maximum Tensile Strength	2700 N				
Min. Bend Radius	Loaded:		20 times of cable diameter		
	Unloaded:		10 times of cable diameter		

* LSZH: Low Smoke Zero Halogen.

Features and Benefits

- Gel-filled buffer tube design
- Cost-effective solution for CATV
- Excellent optical, mechanical and environmental characteristics
- Color coded tube for correct multi-fiber identification and use
- Compliant with EIA, IEC and Telcordia standards

Color Code

Single Layer	1	2	3	4	5	6	7	8	9	10	11	12						
	Blue	Orange	Green	Brown	Slate	White	Red	Black	Yellow	Violet	Rose	Aqua						
Double Layers	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18
	Blue	Orange	Green	Brown	Slate	White	Blue	Orange	Green	Brown	Slate	White	Red	Black	Yellow	Violet	Rose	Aqua

* Color arrangement would be changed to meet customers' requests.

Fiber Specification

Fiber Attenuation	1310nm	≤ 0.4 dB/km	PMD	< 0.2 ps/km ^{1/2}	
	Singlemode	1550nm		≤ 0.3 dB/km	Mode-Field Diameter (SM) G.652D
Multimode	850nm	≤ 3.5 dB/km	G.657A	1310nm: 9.0 ~ 9.4 μm, ± 0.4 μm	
	1300nm	≤ 1.0 dB/km		1550nm: 10.0 ~ 10.7 μm ± 0.7 μm	
Bandwidth(MM)	850nm	≥ 500 MHz-km	Multimode Core	50	50 μm ± 3 μm
	OM2-50/125	1300nm		≥ 500 MHz-km	62.5
OM3-50/125	850nm	≥ 1500 MHz-km	Cladding Diameter	125 μm ± 1 μm	
	1300nm	≥ 500 MHz-km		Coating Diameter	250 μm ± 15 μm (colored)
62.5/125	850nm	≥ 200 MHz-km			
	1300nm	≥ 500 MHz-km			

Mechanical Specification (added attenuation: dB)

Tensile and Bending Test	TIA/EIA-455-33	Singlemode ≤ 0.2 ; Multimode ≤ 0.3
Crush Resistance	TIA/EIA-455-41	Singlemode ≤ 0.2 ; Multimode ≤ 0.3
Cyclic Flexing	TIA/EIA-455-104	Singlemode ≤ 0.2 ; Multimode ≤ 0.3
Impact Resistance	TIA/EIA-455-25	Singlemode ≤ 0.2 ; Multimode ≤ 0.3
Cable Twist	TIA/EIA-455-85	Singlemode ≤ 0.2 ; Multimode ≤ 0.3

* Compliant with Telcordia GR-20-Core and EIA/TIA standard

Environmental Condition

Temperature Range	Storage	-40°C to + 70°C
	Operating	-30°C to + 70°C
	Installation	-30°C to + 70°C

Ordering Information

Cable Type	LT-SS
Fiber Count	Max. 216
Fiber Type	Singlemode: G.652D, G.657A Multimode: OM1, OM2 or OM3
Fiber Bundle	6 or 12
Jacket Type	PE Jacket



UFO COMMUNICATION

+886 2 26570589

www.ufoc.com.tw csr@ufoc.com.tw